


**LOT#2 VILLAS FRONT ELEVATION**

SCALE: 1/4" = 1'-0"

- NOTES: 1) ALL EXTERIOR WALLS TO BE 2x6 AT 16" OC OR AS NOTED.  
 2) ALL INTERIOR WALLS TO BE 2x4 AT 16" OC OR AS NOTED.  
 3) ALL WINDOW HEADS TO BE 80" ABOVE SUBFL OR AS NOTED.



OCEAN TRAIL, SUITE # 4  
 COROLLA, NC 27927  
 (w)252-453-3600 (f)252-453-9663  
 www.bdahomes.com

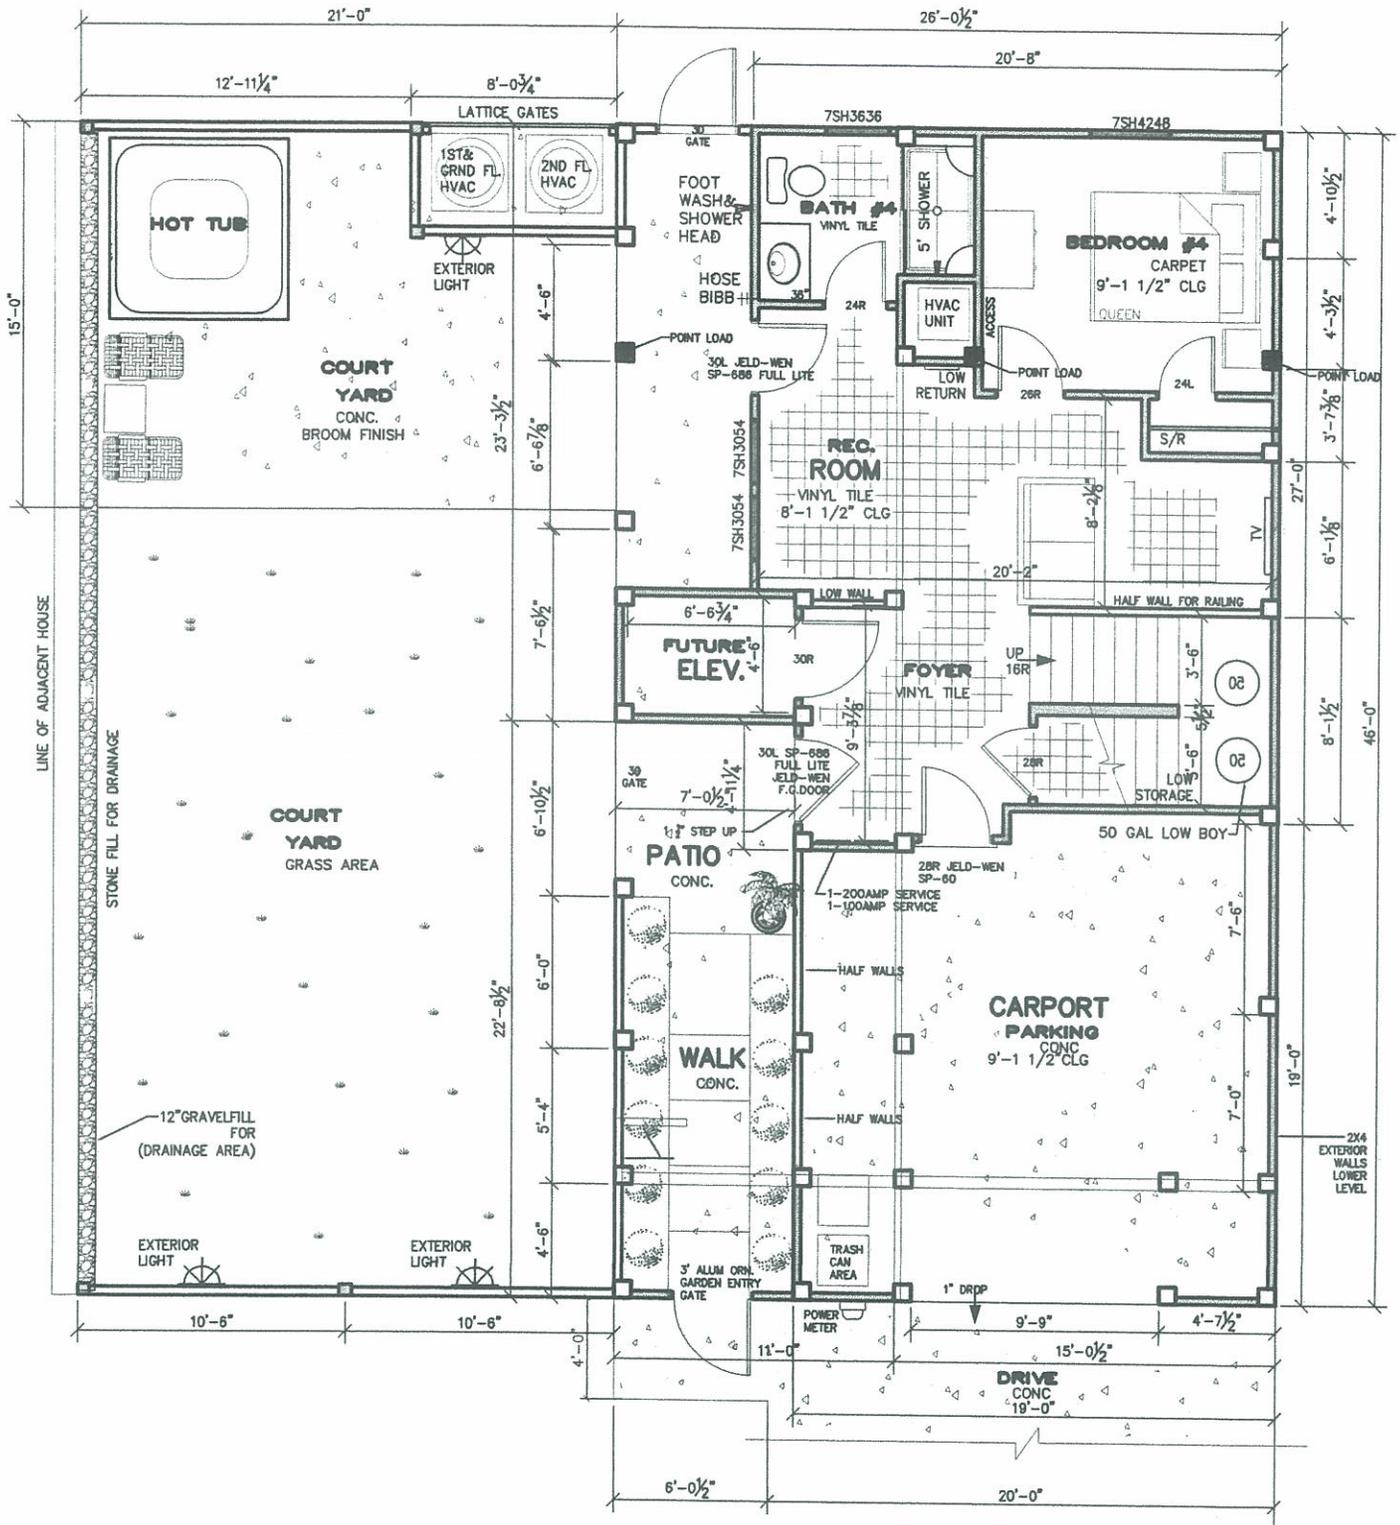


## LOT#2 VILLAS GROUND FLOOR PLAN

- NOTES: 1) ALL EXTERIOR WALLS TO BE 2x6 AT 16" OC OR AS NOTED.  
 2) ALL INTERIOR WALLS TO BE 2x4 AT 16" OC OR AS NOTED.  
 3) ALL WINDOW HEADS TO BE 80" ABOVE SUBFL OR AS NOTED.

SCALE: 1/4" = 1' 6"

**BD&A**

OCEAN TRAIL, SUITE # 4  
 COROLLA, NC 27927  
 (w)252-453-3600 (f)252-453-966  
 www.bdahomes.com

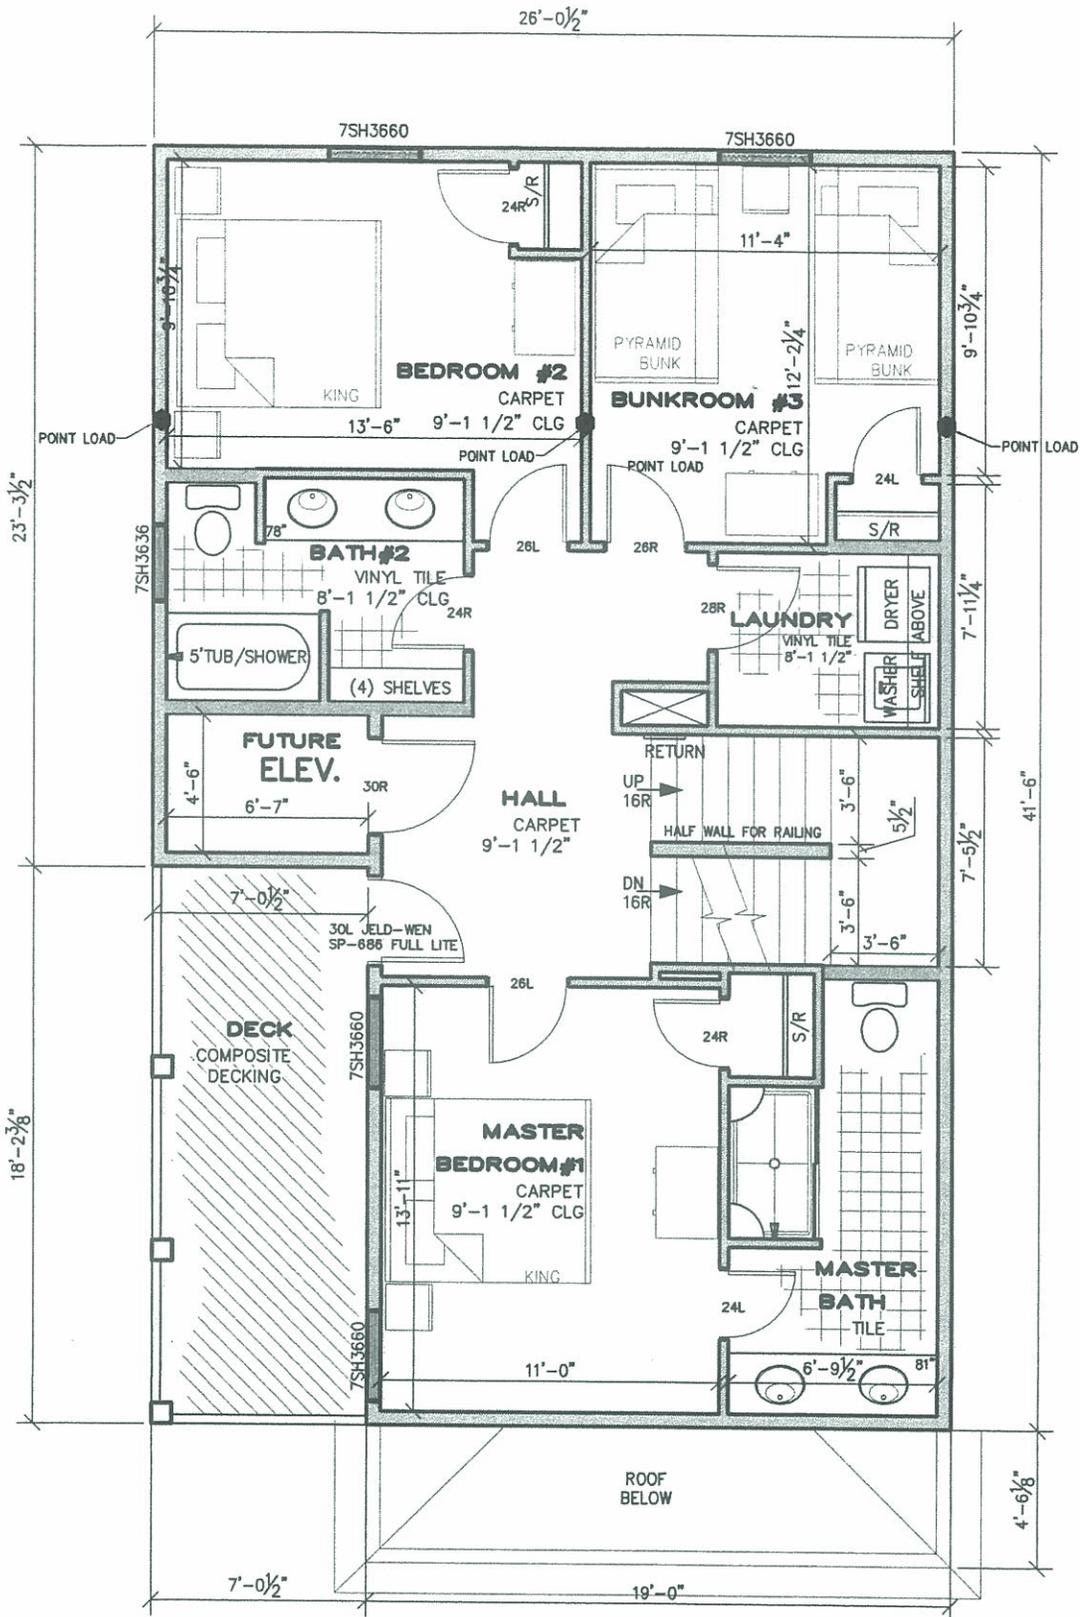


# LOT#2 VILLAS FIRST FLOOR PLAN

- NOTES: 1) ALL EXTERIOR WALLS TO BE 2x6 AT 16" OC OR AS NOTED.  
 2) ALL INTERIOR WALLS TO BE 2x4 AT 16" OC OR AS NOTED.  
 3) ALL WINDOW HEADS TO BE 80" ABOVE SUBFL OR AS NOTED.

SCALE: 1/4" = 1'-0"



OCEAN TRAIL, SUITE # 4  
 COROLLA, NC 27927  
 (w)252-453-3600 (f)252-453-96  
 www.bdahomes.com

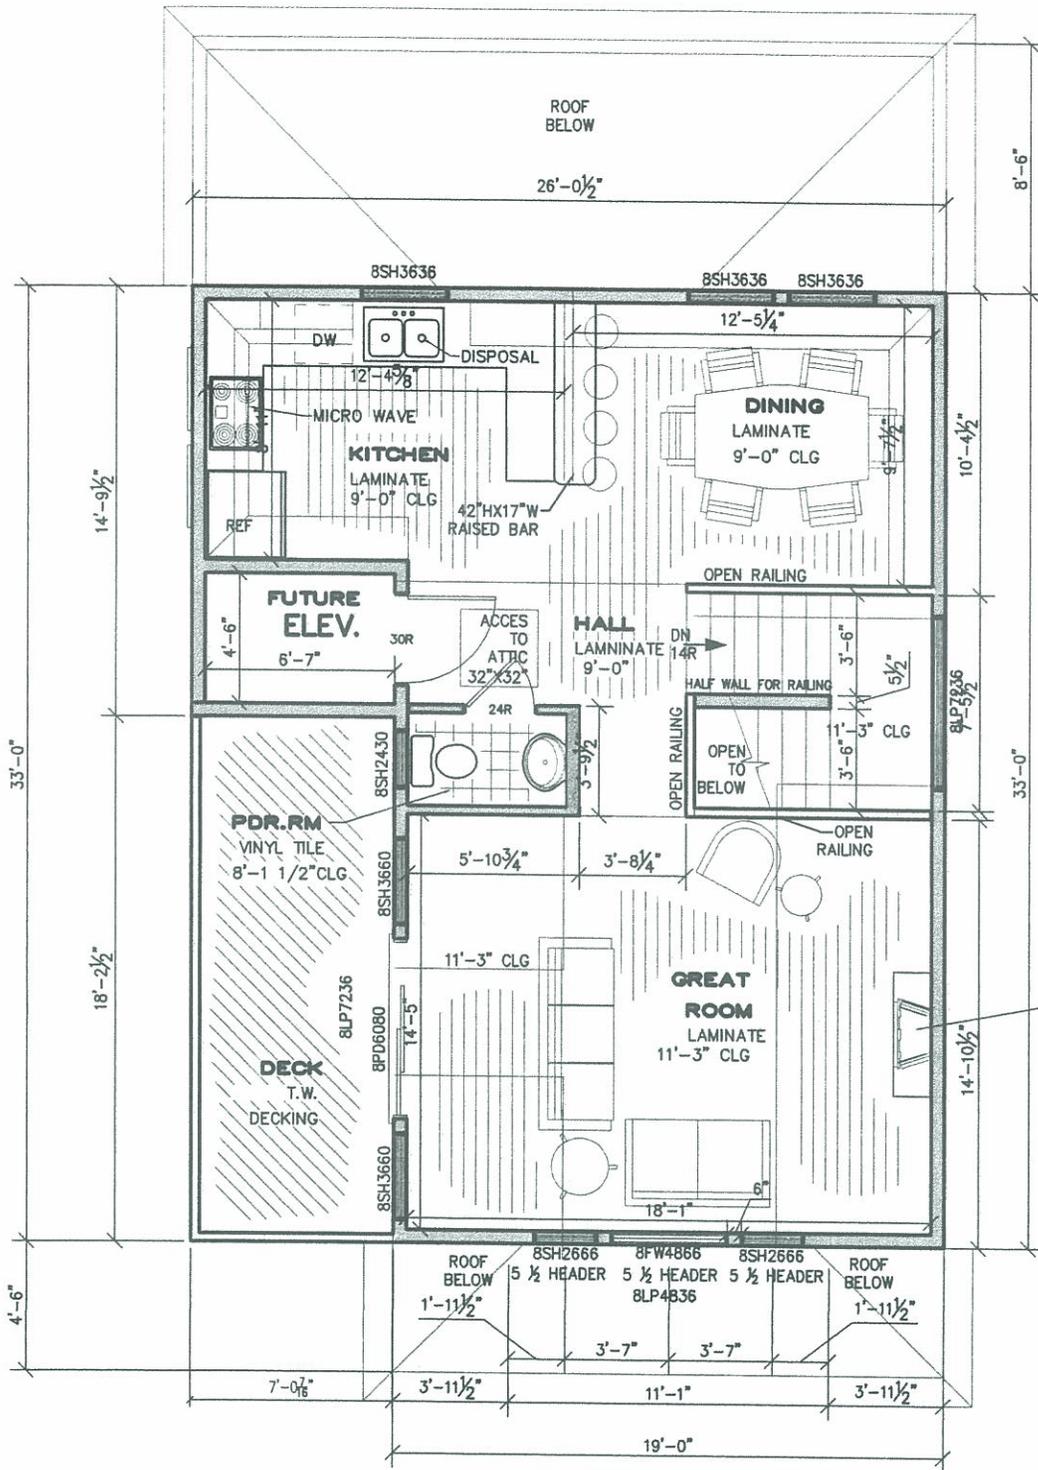

ELECTRIC VENTLESS  
CABINET FIREPLACE  
52"W X 43.25"H X 15"D  
W/ TV ABOVE

**AREA SCHEDULE**

GROUND FLOOR LIVING	495 SF
FIRST FLOOR LIVING	918 SF
SECOND FLOOR LIVING	629 SF
<b>TOTAL HEATED LIVING</b>	<b>2042 SF</b>

ELEVATOR	123 SF
LOW STORAGE	54 SF
<b>TOTAL UNHEATED</b>	<b>177 SF</b>
<b>TOTAL UNDER ROOF</b>	<b>2,219 SF</b>


COURT YARD(CONC)	305 SF
FIRST FLOOR DECK	128 SF
SECOND FLOOR DECK	128 SF
CARPOT PARKING(CONC.)	272 SF
PATIO	338 SF
<b>TOTAL</b>	<b>1172 SF</b>

**LOT#2 VILLAS SECOND FLOOR**


NOTES: 1) ALL EXTERIOR WALLS TO BE 2x6 AT 16" OC OR AS NOTED. SCALE: 1/4" = 1'-0"  
 2) ALL INTERIOR WALLS TO BE 2x4 AT 16" OC OR AS NOTED.  
 3) ALL WINDOW HEADS TO BE 80" ABOVE SUBFL OR AS NOTED.



OCEAN TRAIL, SUITE # 4  
 COROLLA, NC 27927  
 (w)252-453-3600 (f)252-453-966.  
 www.bdahomes.com

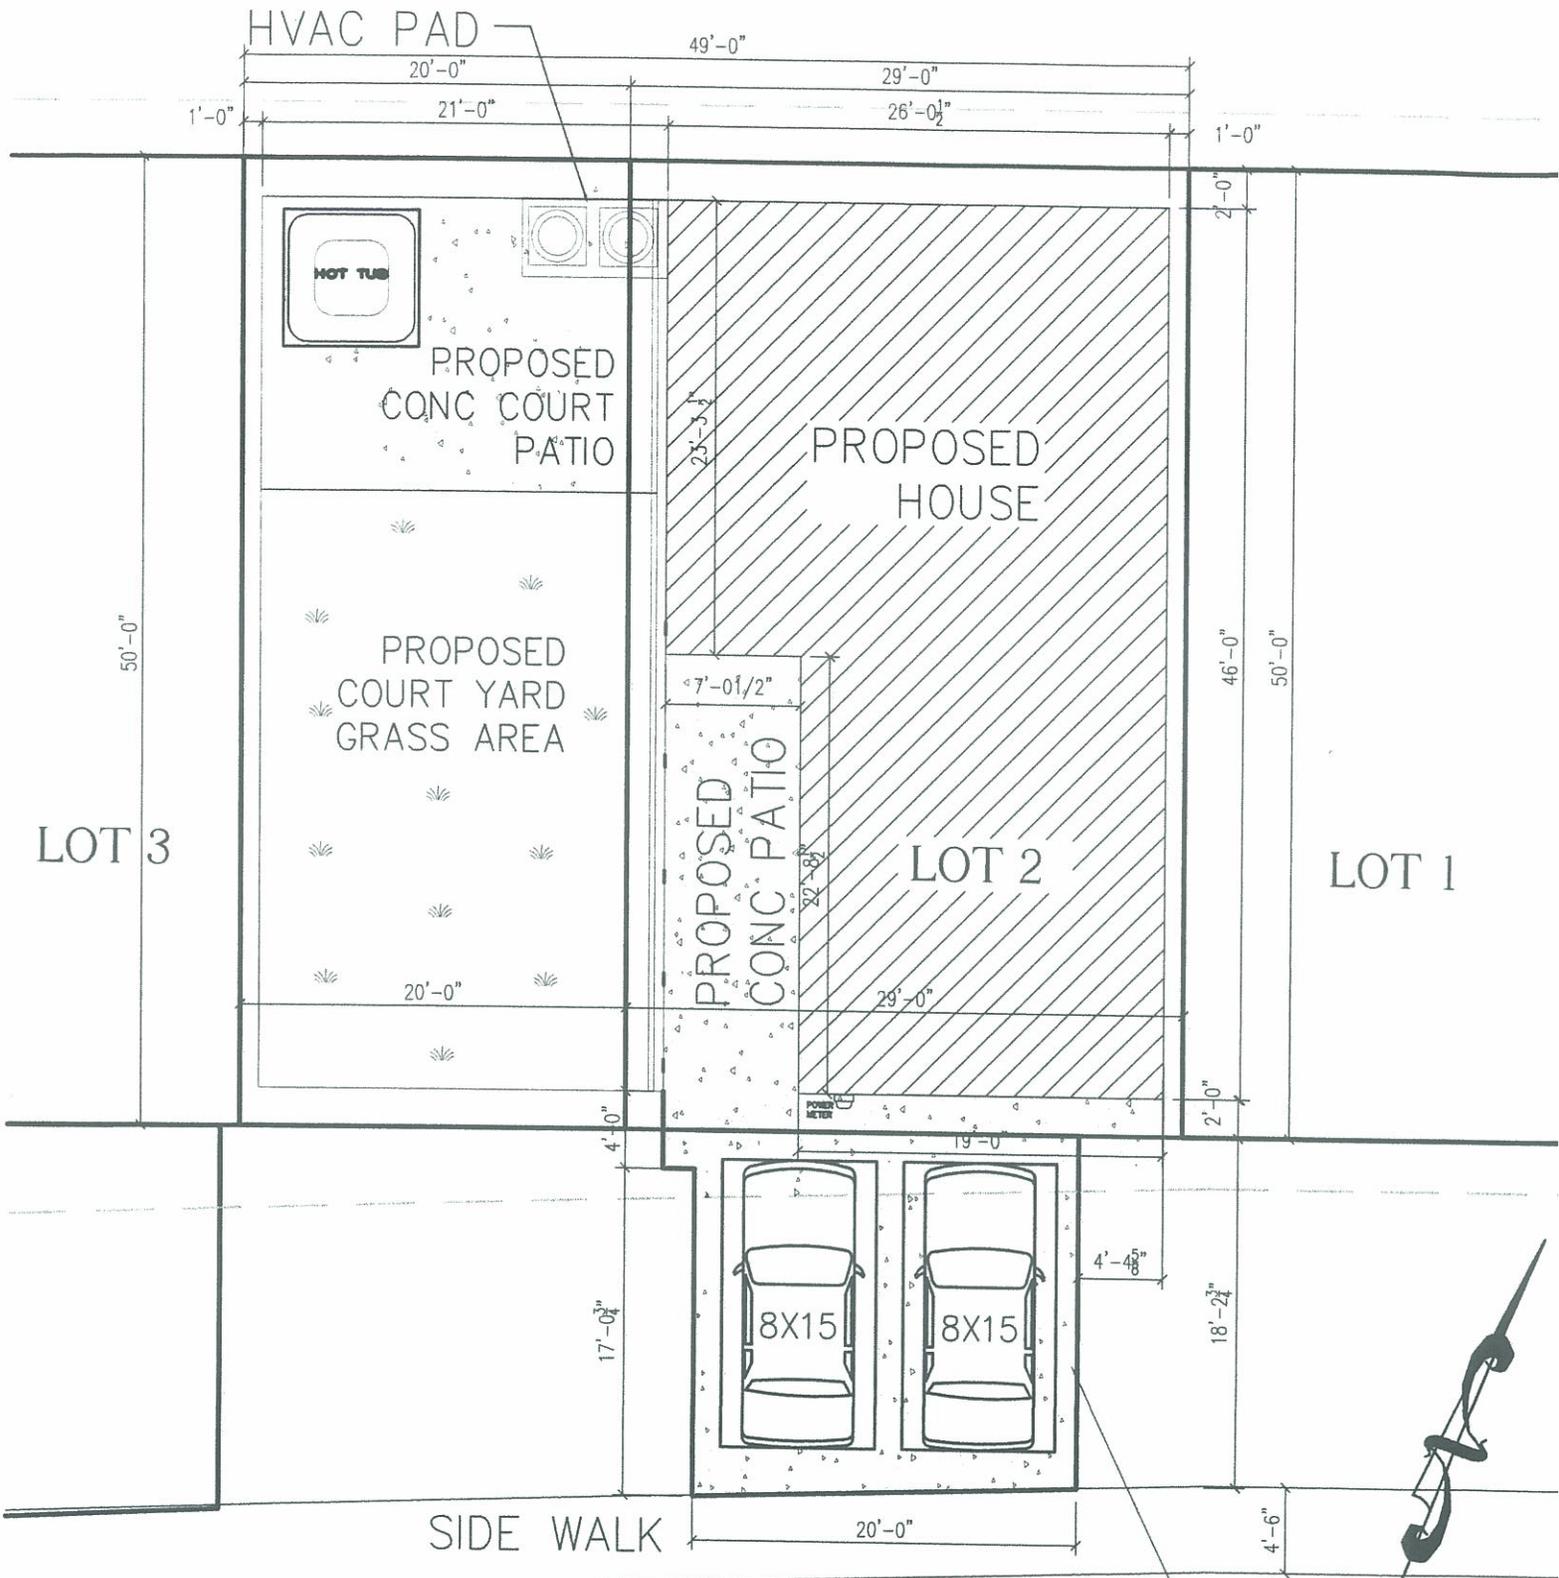

PROPOSED CONCRETE PARKING  
 CANE GARDEN BAY CIRCLE

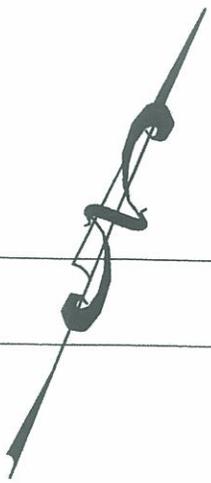

# SITE PLAN

OCEAN TRAIL, SUITE # 4  
 COROLLA, NC 27927  
 (w)252-453-3600 (f)252-453-9663  
 www.bdahomes.com

SCALE: 1" = 10'-0"

HOMESITE #2 Villas At Corolla Bay



BD&A Construction, LLC  
821 Ocean Trail, Suite 4  
Corolla, North Carolina, 27927  
(252) 453-3600

Conditions and Description of Materials- Exhibit II  
Date: March 28, 2011

Owner: Corolla Oceanside, LLC  
821 Ocean Trail  
Corolla, NC 27927

Phone: 252-453-3600  
252-453-3922 fax.

Location: Lot 2 Villas at Corolla Bay  
999 Cane Garden Bay Cir

Area Schedule:

Ground floor living	495	SF		
First floor living	918	SF	First floor deck	128 SF
<u>Second floor living</u>	<u>629</u>	<u>SF</u>	Second floor deck	128 SF
Total heated living	2042	SF	Courtyard (conc)	305 SF
			Carport Parking (conc)	272 SF
Low Storage	54	SF	<u>Patio</u>	<u>338</u> SF
Elevator	123	SF		1172 SF
<u>Total Unheated</u>	<u>177</u>	<u>SF</u>		
Total under roof	2219	SF		

## Description of Materials

I. Lot Preparation / Excavation

- 1) Clearing and grading of homesite for house pad as indicated on site plan.

II. Foundation

- 1) Concrete: 3000 PSI with 4" concrete slab reinforced with 6 x 6 x 6 wire mesh as indicated on piling and ground floor plan.
- 2) Pilings: As indicated on plans
- 3) Termite pre-treat of all heated grade level areas.
- 4) Girders: House Girders to be 2" x 12" treated.  
Deck Girders to be 2" x 10" treated.

999Cane Garden Bay Cir  
Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
Owners Initials \_\_\_\_\_  
Date \_\_\_\_\_

III. **Structural Framing and Exterior Finishing**

- 1) Floor system: 2" x 10" @ 16" on center or as per plans.  
Bridging: Metal X-bracing.
- 2) Sub flooring: 3/4" tongue & groove LP Orange which will be glued, screwed and nailed to joist.
- 3) Exterior walls: 2" x 4" as indicated on plans at 12" or 16" on center as applicable or 2"x 6" as indicated on plans at 16" on center as applicable.  
See plans for detail.
- 4) Sheathing: 1/2" OSB w/ 30 lb. felt paper wrap.
- 5) Interior walls: 2" x 4" or 2" x 6" as indicated on plans 16" on center. (Spruce)  
2" x 4" on load bearing walls, 12" on center. (Spruce)
- 6) Siding & Finishing: LP Smart Lap siding & LP Smart trim painted in one color. Board and Batten in Gables to be painted in one color.
- 7) Ceiling joist: 2" x 8" SYP @ 16" on center or per code. (Pine)
- 8) Roof framing: 2" x 10" SPF @ 16" on center. (Spruce)
- 9) Roof sheathing: 1/2" OSB w/ 30 lb. felt paper.
- 10) Roof shingles: Certaineed Landmark shingle. Shingles offer a 30-year limited transferable warranty against manufacturing defects. 5- year SureStart protection, 10-year algae resistance warranty, and 10-year 110 mph wind resistance when used with Certaineed valley and caps shingles. Warranty through Certaineed.
- 11) Roof ventilation: Rudeen roof vents placed according to code.
- 12) Soffit: LP Smart soffit and Composite fascia.
- 13) Deck system: 2" x 8" treated joist @ 16" on center with treated lumber Decking.
- 14) Railing and lattice detail: Treated lumber- painted.
- 15) Underpinning: 4'x8' Hardiplank underpinning, painted in one color.
- 16) Steel Fitch plate(s) as indicated on plans as per engineer.

IV. **Windows and Exterior Doors**

- 1) Jeld-Wen Builders Series Vinyl single hung windows (ground & first floor non-impact resistant) & Jeld-Wen Premium Atlantic Vinyl single hung windows (2nd FLOOR IMPACT RESISTANT GLASS DP 50 RATING) w/ **Low E 366 Glass and doors** sized according to the plans, (w/o grilles). Windows and Doors come with 10-year warranty on parts and 20 year warranty on the glass through Jeld-Wen.

999Cane Garden Bay Cir  
Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
Owners Initials \_\_\_\_\_  
Date \_\_\_\_\_



- 8) 6 telephone jacks to be located by owner. To be Category #5 wiring with home run.
- 9) Bath fan/light combo to be located in all Baths.
- 10) GFI receptacles in Kitchen, all baths, and ground floor exterior .
- 11) Pre wire for future elevator.

**IX. Lighting Fixtures**

- 1) All light circuitry , depending on amperage requirements, shall be 14/2 gauge copper or 12/2 gauge copper.
- 2) To include:
 

Progress	# P87-AT	Recessed can with # P-6666 75 watt step baffle trim ring and 75 watt R-30 bulb.
Progress	# P87-AT	Recessed can with #P-6676-29 75 watt eyeball trim kit and 75 watt R-30 bulb.
Progress	# P87-AT	Recessed can with P-6664-30 40 watt shower light shatter resistant w/white diffuser.
Lithonia	# S-140-RS	Fluorescent light fixture 48" long 1, F40CW bulb without cover.
Progress	P-5705-30	Ceiling outdoor light fixture, white cover w/60 watt inside frosted bulbs.
Eagle		White keyless base w/60 watt inside frosted bulb.
- 3) Six (6) Patton (Fasco) or equal, 52" white ceiling fans/light kits.
- 4) Light fixtures over vanities to be Progress P3229-18, or equal, at height of 85" from floor unless otherwise noted.
- 5) Two Pendant lights over kitchen bar.
- 6) Dining Room fixture.

**X. Plumbing – Fixture**

Outside / Misc.

- 2 Hose Bibbs Frost proof Woodford #17-CP.

**Ground Floor**

2 RUUD PES-52 - 50-gallon energy miser, low boy, dual element quick recovery water heater. Relief line to be copper run outside house and to ground level w/recirculating pump

**Master Bath #4**

1 Mansfield Elongated 1.6 gallon toilet w/CHRCH 585EC-000 white elongl seat and matching trip lever.

1 Cultured Marble Integrated bowl w/ 8" drilling w/Moen or equal faucet. Polished chrome.

1 Aker GB-60 5' white gel-coat fiberglass tub/shower w/ AS.1495.572.002 Reliant Satin nickel pressure balanced bath and shower faucet. Watco schedule 40 PVC lift and turn waste and overflow.

**First Floor**

**Master Bath #1**

1 Mansfield Elongated 1.6 gallon toilet w/CHRCH 585EC-000 white elongl seat and matching trip lever.

2 Cultured Marble Integrated bowl w/ 8" drilling w/Moen or equal faucet. Polished chrome.

1 Aker GB-60 5' white gel-coat fiberglass shower w/ AS.1495.572.002 Reliant Satin nickel pressure balanced bath and shower faucet.

**Bath #2-3**

1 Mansfield Elongated 1.6 gallon toilet w/CHRCH 585EC-000 white elongl seat and matching trip lever.

2 Cultured Marble Integrated bowl w/ 8" drilling w/Moen or equal faucet

1 Aker GB-60 5' white gel-coat fiberglass tub/shower w/ AS.1495.572.002 Reliant Satin nickel pressure balanced bath and shower faucet. Watco schedule 40 PVC lift and turn waste and overflow.

**Laundry**

1 Washing Machine Recessed box w/ 2 cut off valves. Valves may either be brass or acetal. Locate bottom of box 42" from finished floor.

999Cane Garden Bay Cir  
Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
Owners Initials \_\_\_\_\_  
Date \_\_\_\_\_

**Second Floor**

Kitchen

- 1 Bango sink 18-gauge stainless steel undertone double equal under mount sink with kitchen combo faucet and sink strainers in satin nickle. To include under counter mounting kit.

Powder Room

- 1 American Standard 0115.404.020 21" X 17" white vitreous china pedestal sink with 8" drilling and soap recess complete w/Moen or equal faucet.
- 1 Mansfield Elongated 1.6 gallon toilet w/CHRCH 585EC-000 white elongated seat and matching trip lever.

Water piping: Apex  
Water supply: Central Water System – ***Water Tap \$6,000.00***  
Sewage disposal: Central Sewer system

XI. **Interior Finish**

- 1) Interior doors and trim: Six-panel hollow doors and trim with painted finish.
- 2) Room finish as indicated in the Room Finish Schedule attached hereto and hereinafter referred to as "Attachment A".
- 3) **Carpet \$ 4,075.00** including labor and material w/5 lb. rebond cushion and installation.
- 4) **Vinyl Tile \$3,150.00** including labor and material ¼" underlayment.
- 5) **Ceramic Tile \$600.00** installed including labor and material with 1/4" underlayment.
- 6) **Laminate \$4,850.00** installed including labor and material.
- 7) All interior and exterior door hardware to be Lever Handle style, finish to be Satin nickel.
- 8) All rooms to be painted white unless indicated otherwise on Room Finish Schedule, Attachment "A". All bedroom closets walls and ceilings finished with painted textured drywall..
- 9) Necessary Lenape Carrousel series porcelain towel bars, towel rings, paper holders and robe hooks.
- 10) All mirrors to be located over all sinks to be vanity width or picture framed.

XII. Cabinets/laminate **\$6,776.00**

XIII. Appliances **\$ 3,148.00**

999Cane Garden Bay Cir  
Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
Owners Initials \_\_\_\_\_  
Date \_\_\_\_\_

XIV. *Driveways, Turn-Arounds*  
Concrete drive as indicated on site plan

XV. *Landscaping and Finish Grading*  
Landscaping \$2,000.00 for sod and irrigation of courtyard.

XVI. *Courtyard w/Fence*  
Concrete deck with fencing as per plans.

XVII. *Hot Tub \$3,500.00*

Date Approved by Owner \_\_\_/\_\_\_/\_\_\_ By \_\_\_\_\_

Date Approved by Owner \_\_\_/\_\_\_/\_\_\_ By \_\_\_\_\_

Room finish schedule - "Attachment A"  
 Lot 01- Villas at Corolla Bay

ROOM NAME	FLOORS	WALLS	CEILINGS
<b><u>Ground Floor</u></b>			
Foyer	Vinyl tile	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Rec. Room	Vinyl tile	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Bedroom #4	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Master Bath #4	Vinyl tile	Painted sheetrock w/ smooth finish.	Painted sheetrock w/ knockdown finish.
<b><u>First Floor</u></b>			
Laundry	Vinyl tile	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Master Bedroom #1	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Master Bath #1	Tile	Painted sheetrock w/ smooth finish.	Painted sheetrock w/ knockdown finish.
Bedroom #2	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Bath #2	Vinyl tile	Painted sheetrock w/ smooth finish.	Painted sheetrock w/ knockdown finish.
Bedroom #3	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Hall	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Stairs	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.

999Cane Garden Bay Cir  
 Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
 Owners Initials \_\_\_\_\_  
 Date \_\_\_\_\_

ROOM NAME	FLOORS	WALLS	CEILINGS
<b><u>Second Floor</u></b>			
Great Room	Laminate	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Dining Room	Laminate	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.
Kitchen	Laminate	Painted sheetrock w/ smooth finish.	Painted sheetrock w/ knockdown finish.
Power Room	Laminate	Painted sheetrock w/ smooth finish.	Painted sheetrock w/ knockdown finish.
Landing/Stairs	Carpet	Painted sheetrock w/ knockdown finish.	Painted sheetrock w/ knockdown finish.

999Cane Garden Bay Cir  
 Lot 2, Villas @ Corolla Bay

Initials \_\_\_\_\_  
 Owners Initials \_\_\_\_\_  
 Date \_\_\_\_\_